

NEC MultiSync® X552S

Order Code: X552S

NEC LCD 55" Large Format Display

The superslim MultiSync® X552S delivers the longevity and reliability customers expect from a public display thanks to a professional public display panel and proven NEC engineering excellence. The reduced depth and light weight makes it easy to handle and integrate while the new slim option slot STv2 allows for the integration of powerful slot-in PCs and other option slot products.

Ideal for a wide array of applications such as retail signage including 24/7, transport applications, conference rooms, lobby / reception installations and integration in totems and furniture.



DELIVERING GENUINE BENEFITS

Colour Matching - the display can be hardware calibrated to display a certain colour temperature or brightness to match other displays in the same installation.

Super slim design - only 46.1 mm total depth.

Programmable Ambient Light Sensor - for reduced power consumption and eye pleasing brightness levels.


DICOM support- for medical applications.

Free DisplayNote Presenter Licence - present, share, collaborate with multiple participants across multiple devices (limited availability).

Free Download of Multi-Display Management Software - with NaViSet Administrator 2 you can manage all your connected display devices from a centralised location.

OUTSTANDING PERFORMANCE

- Thanks to **Edge LED backlight technology** the display comes with super slim and light weight design which enables integration in extremely slim cabinets and installations with space constraints.
- **Unique NEC heat management** enables the user to monitor and control the heat inside the display with user controllable fans. Ideal for heavy duty applications or integration job.
- **Slot Technology version 2 (STv2)** allows for the integration of single board computers and other option slot products without the need to stow external equipment.
- **Integrated speakers** save installation costs and preserve the clean look of the screen.
- The **optional NEC wall mount** emphasizes the slim design of the product and adds a mere 7.5 mm making the installation 53.6 mm deep.
- **Peace of mind** thanks to full control of the display via LAN with free NEC software and alert emails in the unlikely event of a problem such as no signal, overheating, back light failure etc.
- **Daisy chaining** via DVI (max. 9 pieces) offering high flexibility at no extra cost if the signal needs to be passed on for videowalls or back-to-back installations.

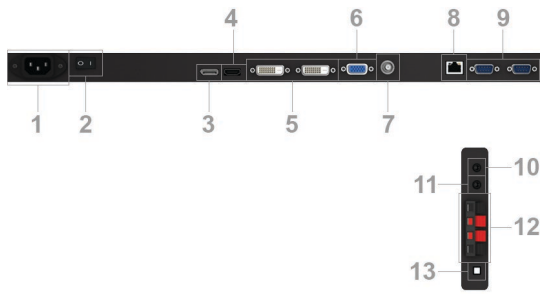

1. Power
2. Main Switch
3. DisplayPort in
4. HDMI in
5. DVI in / out
6. D-sub with VGA, Component, Composite and S-Video
7. Composite in
8. LAN with SNMP
9. External control RS-232 in / out
10. Audio out
11. Audio in
12. External speakers
13. Internal / external speaker switch

SPECIAL CHARACTERISTICS

Advanced fan control, Automatic Alarm E-Mails, Copy display settings through RS232, DICOM support, FREE DisplayNote Presenter, Hardware colour calibration possible, Input name adjustment, Matrix memory, NaViSet Administrator 2, OSD rotation for portrait mode, Programmable ambient light sensor, Rapid input switching, Scheduler, Screen saver functions, SNMP LAN, TileMatrix (10 x 10), User input priority definition, Various picture in picture options



Energy Efficiency Ambient light sensor; LED backlight; Carbon savings meter; ECOMode

Ecological Materials Mercury free; Optional feet; Manuals on CD

Ecological Standards Energy Star 5.1

Technical Specification NEC MultiSync® X552S

| | |
|---|--|
| DISPLAY | |
| Panel Technology | S-PVA with edge LED backlights |
| Active Screen Area (W x H) [mm] | 1,209.6 x 680.4 |
| Screen Size [inch/cm] | 54.5 / 138.8 |
| Aspect Ratio | 16:9 |
| Brightness (shipping) [cd/m ²] | 500, (700 max) |
| Contrast Ratio (typ.) | 4000:1 |
| Viewing Angle [°] | 178 horizontal / 178 vertical (typ. at contrast ratio 10:1) |
| Response Time (typ.) [ms] | 8 (grey-to-grey) |
| Panel Refresh Rate [Hz] | 60 |
| SYNCHRONISATION RATE | |
| Horizontal Frequency [kHz] | 31.5 - 91.1 |
| Vertical Frequency [Hz] | 50 - 85 |
| RESOLUTION | |
| Native Resolution | 1920 x 1080 at 60 Hz |
| Supported on digital and analogue inputs (PC) | 1920 x 1080; 1680 x 1050; 1600 x 1200; 1400 x 1050; 1366 x 768; 1280 x 1024; 1280 x 960; 1280 x 800; 1280 x 768; 1280 x 720; 1024 x 768; 800 x 600; 720 x 576; 720 x 400; 640 x 480 |
| Supported on digital inputs (Video) | 1920 x 1080i (59.94/60)16:9; 1920 x 1080i (50)16:9; 1920 x 1080p (59.94/60) 16:9; 1920 x 1080p (50)16:9; 1920 x 1080p (23.97/24)16:9; 1920 x 1080p (25) 16:9; 1920 x 1080p (29.97/30)16:9; 1280 x 720p (59.94/60)16:9; 1280 x 720p (50) 16:9; 720 x 576p (50)16:9; 720 x 480p (59.94/60)16:9 |
| CONNECTIVITY | |
| Input Video Analogue | 1 x D-sub 15 pin; Composite (BNC) |
| Input Video Digital | 1 x DVI-D (with HDCP); 1 x HDMI (with HDCP); 1 x DisplayPort (with HDCP) |
| Input Audio Analogue | 1 x 3,5 mm jack |
| Input Audio Digital | DisplayPort; 1 x HDMI |
| Input Control | LAN 100Mbit; RS232 |
| Output Video Digital | 1 x DVI-D (with HDCP) |
| Output Audio Analogue | 3,5mm jack |
| Output Control | RS232 |
| Remote Control | LAN with SNMP; RS-232C (9-pin D-sub) Input and Output; Remote Control IR |
| OPTION SLOT | |
| Slot Technology | STv2 (compatible with Intel / NEC OPS standard) |
| Inrush Current [A] | max. 10 |
| Power Consumption [W] | max. 61 |
| Voltage / Current [V/A] | 16/4 |
| ELECTRICAL | |
| Power Consumption on Mode [W] | 160 shipping; 305 (max.) |
| Power Savings Mode [W] | < 0.5 (ECO Standby); < 1 |
| Power Management | VESA DPMS |
| ENVIRONMENTAL CONDITIONS | |
| Operating Temperature [°C] | +0 to +40 |
| Operating Humidity [%] | 20 to 80 |
| Storage Humidity [%] | 10 to 90 |
| Storage Temperature [°C] | -20 to +60 |
| MECHANICAL | |
| Dimensions (W x H x D) [mm] | Without stand: 1,254.5 x 725.3 x 46.1 |
| Weight [kg] | Without stand: 24.5 |
| Bezel Width [mm] | 20.5 (left and right); 20.5 (top and bottom) |
| VESA Mounting [mm] | 300 x 300 (FDMI); 4 holes; M6 |
| AVAILABLE OPTIONS | |
| Accessories | Feet (ST-5220); Speaker (SP-PXS55 SM); Speaker (SP-RM1) Wall mount (LSMU, LTMU, WM-46S-L) |
| Option Slot | HD-SDI 1.5 and 3G; Intel Atom, Celeron and Core CPUs |
| ADDITIONAL FEATURES | |
| Colour Versions | Black Front Bezel, Black Back Cabinet |
| Safety and Ergonomics | C-tick; CE; FCC Class B; PSB; TÜV GS; UL/C-UL or CSA; VCCI; Energy Star 5.1; RoHS |
| Plug and Play | VESA DDC2Bi |
| Audio | Integrated Speakers (5 W + 5 W); Optional speakers NEC SP-RM1 (2x15W) |
| Shipping Content | Display; DVI-D cable; Power Cable; slot cover for STv2; Free LAN control software (download); Remote Control (IR) |
| Warranty | 3 years conditional incl. backlight |

For more information, visit nz.nec.com, email sales@nec.co.nz or call 04 381 1111