

# NEC MultiSync® X401S

Order Code: X401S

NEC LCD 40" Large Format Display

The superslim MultiSync® X401S delivers the longevity and reliability customers expect from a Public Display thanks to a professional Public Display panel and proven NEC engineering excellence. The reduced depth and light weight makes it easy to handle and integrate while the new slim option slot STv2 allows for the integration of powerful slot-in PCs and other option slot products.

Ideal for a wide array of applications such as retail signage including 24/7, transport applications, conference rooms, lobby/ reception installations and integration in totems and furniture.



## DELIVERING GENUINE BENEFITS

**Super slim design** - only 43.3 mm total depth.

**Programmable Ambient Light Sensor** - for reduced power consumption and eye pleasing brightness levels.

**DICOM support**- for medical applications.

**Colour Calibration** - the display can be hardware colour calibrated to make sure e.g. customer's logo are displayed accurately.

**Free DisplayNote Presenter Licence** - present, share, collaborate with multiple participants across multiple devices (limited availability).


**Free Download of Multi-Display Management Software** - with NaViSet Administrator 2 you can manage all your connected display devices from a centralised location.



NaViSet  
Administrator 2

## OUTSTANDING PERFORMANCE

- Thanks to **Edge LED backlight technology** the display comes with superslim and light weight design which enables integration in extremely slim cabinets and installations with space constraints.
- **Unique NEC heat management** enables the user to monitor and control the heat inside the display with user controllable fans. Ideal for heavy duty applications or integration jobs.
- **Slot Technology version2 (STv2)** allows for the integration of single board computers and other option slot products without the need to stow external equipment.
- **Integrated speakers** save installation costs and preserve the clean look of the screen.
- **Peace of mind** thanks to full control of the display via LAN with free NEC software and alert emails in the unlikely event of a problem such as no signal, overheating, back light failure etc.
- **Daisy chaining via DVI** (max. 9 pieces) offering high flexibility at no extra cost if the signal needs to be passed on for videowalls or back-to-back installations.
- **Free DisplayNote Presenter Licence** - present, share, collaborate with multiple participants across multiple devices (available until March 2014). Visit [www.displaynote-nec.com](http://www.displaynote-nec.com).

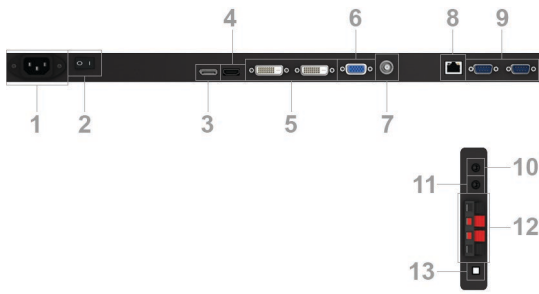

1. Power
2. Main Switch
3. DisplayPort in
4. HDMI in
5. DVI in / out
6. VGA IN (mini D-Sub 15 pin)
7. Composite in
8. LAN with SNMP
9. External control RS-232 in / out
10. Audio out
11. Audio in
12. External speakers
13. Internal / external speaker switch

**SPECIAL CHARACTERISTICS**

Advanced fan control, Automatic Alarm E-Mails, Copy display settings through RS232, DICOM support, FREE DisplayNote Presenter, Hardware colour calibration possible, Input name adjustment, Matrix memory, NaViSet Administrator 2, OSD rotation for portrait mode, Programmable ambient light sensor, Rapid input switching, Scheduler, Screen saver functions, TileMatrix (10 x 10), User input priority definition, Various picture in picture options



**Energy Efficiency** Ambient light sensor; LED backlight; Carbon savings meter; ECOMode

**Ecological Materials** Mercury free; Optional feet; Manuals on CD

**Ecological Standards** Energy Star 5.1

**Technical Specification NEC MultiSync® X401S**

<b>DISPLAY</b>	
Panel Technology	S-PVA with edge LED backlights
Active Screen Area (W x H) [mm]	885.6 x 498.2
Screen Size [inch/cm]	40 / 101.6
Aspect Ratio	16:9
Brightness (shipping) [cd/m <sup>2</sup> ]	500, (700 max)
Contrast Ratio (typ.)	3500:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8 (grey-to-grey)
Panel Refresh Rate [Hz]	60
<b>SYNCHRONISATION RATE</b>	
Horizontal Frequency [kHz]	31.5 - 91.1
Vertical Frequency [Hz]	50 - 85
<b>RESOLUTION</b>	
Native Resolution	1920 x 1080 at 60 Hz
Supported on digital and analogue inputs (PC)	1920 x 1080; 1680 x 1050; 1600 x 1200; 1400 x 1050; 1366 x 768; 1280 x 1024; 1280 x 960; 1280 x 800; 1280 x 768; 1280 x 720; 1024 x 768; 800 x 600; 720 x 576; 720 x 400; 640 x 480
Supported on digital inputs (Video)	1920 x 1080i (59.94/60)16:9; 1920 x 1080i (50)16:9; 1920 x 1080p (59.94/60) 16:9; 1920 x 1080p (50)16:9; 1920 x 1080p (23.97/24)16:9; 1920 x 1080p (25) 16:9; 1920 x 1080p (29.97/30)16:9; 1280 x 720p (59.94/60)16:9; 1280 x 720p (50) 16:9; 720 x 576p (50)16:9; 720 x 480p (59.94/60)16:9
<b>CONNECTIVITY</b>	
Input Video Analogue	1 x D-sub 15 pin; Composite (BNC)
Input Video Digital	1 x DVI-D (with HDCP); 1 x HDMI (with HDCP); 1 x DisplayPort (with HDCP)
Input Audio Analogue	1 x 3,5 mm jack
Input Audio Digital	DisplayPort; 1 x HDMI
Input Control	LAN 100Mbit; RS232
Output Video Digital	1 x DVI-D (with HDCP)
Output Audio Analogue	3,5mm jack
Output Control	RS232
Remote Control	LAN with SNMP; RS-232C (9-pin D-sub) Input and Output; Remote Control IR
<b>OPTION SLOT</b>	
Slot Technology	STv2 (compatible with Intel / NEC OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4
<b>ELECTRICAL</b>	
Power Consumption on Mode [W]	110 shipping; 235 (max.)
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS
<b>ENVIRONMENTAL CONDITIONS</b>	
Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to +60
<b>MECHANICAL</b>	
Dimensions (W x H x D) [mm]	Without stand: 925.1 x 537.1 x 43.3
Weight [kg]	Without stand: 14.9
Bezel Width [mm]	18 (left and right); 18 (top and bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
<b>AVAILABLE OPTIONS</b>	
Accessories	Feet (ST-322); Speaker (SP-RM2); Wall mount (MSMU, MTMU, MTAPU)
Option Slot	Built-in PC; HD-SDI board
<b>ADDITIONAL FEATURES</b>	
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	C-tick; CE; FCC Class A; PSB; TÜV GS; UL/C-UL or CSA; VCCI; Energy Star 5.1; RoHS
Plug and Play	VESA DDC2Bi
Audio	Integrated Speakers (5 W + 5 W); Optional speakers NEC SP-RM2 (2x15W)
Shipping Content	Display; Power Cable; slot cover for STv2; VGA cable; Free LAN control software (download); Remote Control (IR)
Warranty	3 years conditional incl. backlight

For more information, visit [nz.nec.com](http://nz.nec.com), email [sales@nec.co.nz](mailto:sales@nec.co.nz) or call 04 381 1111